

MODEL

12266DLD-DS

1200 DOUBLE MONITORED MAGLOCK WITH DOOR STATUS MONITORING

12/24 VDC

1200 double monitored electromagnetic lock with 545 kg holding force, ideal for most indoor installations. Equipped with LED lock status indication and relay outputs for remote signalling, plus door status monitoring for door position detection.

- Life Safety Applications
- Zero Residual Magnetism
- RoHS Compliant
- 12/24 VDC Selectable
- MOV Surge & Spike Protection

SPECIFICATIONS

Holding Force	Up to 1200lbs (545kg)
Lock Status Monitoring	Yes (LED Indicator & Door Position Contact)
Current / Voltage	12VDC : 480mA ±10% 24VDC : 240mA ±10%
EST Weight	9.6kg approx
Housing	Anodized Aluminium
Operating Temperature	-10 ~ +55° C
Operating Humidity	0~95% (non condensing)

DIMENSIONS (mm)

CODE: 12266DLD-DS

Maglock Size (L × W × H)	532 × 76 × 40 mm	
Armature Plate Size (L × W × H)	195 × 61 × 16 mm	x 2

MAGLOCK

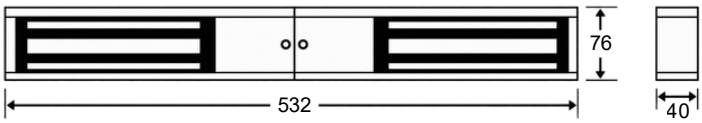

ARMATURE PLATE



x 2

Note: All dimensions are in millimetres (mm). Dimensions shown are nominal. Unless otherwise specified, a manufacturing tolerance of ±0.5 mm applies.

COMPATIBLE BRACKETS



ZL-266



AZLG-DC-266



U1-266



LS-266



AH1200



1200ABP



1200ABP

ESI Access Sdn Bhd

24, Jalan Industri USJ 1/12, Taman Perindustrian USJ 1, 47610 Subang Jaya, Selangor, Malaysia.

+603 8024 9318

sales@esi-access.com

www.esi-access.com

AGM10327