Excel Security Innovation



MODEL

12266LD-DS

1200 MONITORED MAGLOCK WITH DOOR STATUS MONITORING

12/24 VDC

1200 single monitored electromagnetic lock with 545 kg holding force, ideal for most indoor installations. Equipped with LED lock status indication and relay outputs for remote signalling, plus door status monitoring for door position detection.

- Life Safety Applications
- Zero Residual Magnetism
- RoHS Compliant
- 12/24 VDC Selectable
- MOV Surge & Spike Protection

SPECIFICATIONS

Holding Force	Up to 1200lbs (545kg)
Lock Status Monitoring	Yes (LED Indicator & Door Position Contact)
Current / Voltage	12VDC : 480mA ±10% 24VDC : 240mA ±10%
EST Weight	4.8kg approx
Housing	Anodized Aluminium
Operating Temperature	-10 ~ +55° C
Operating Humidity	0~95% (non condensing)

DIMENSIONS (mm)

CODE: 12266LD-DS

Maglock Size (L × W × H)	266 × 76 × 40 mm
Armature Plate Size (L × W × H)	195 × 61 × 16 mm

MAGLOCK

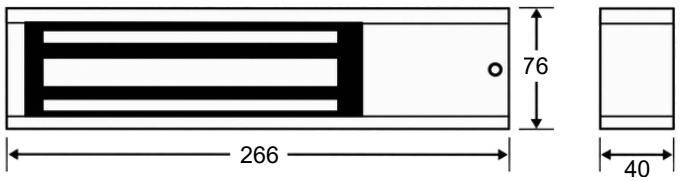

ARMATURE PLATE

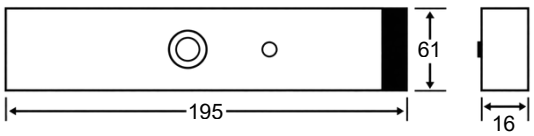

Note: All dimensions are in millimetres (mm). Dimensions shown are nominal. Unless otherwise specified, a manufacturing tolerance of ±0.5 mm applies.

COMPATIBLE BRACKETS


ZL-266


AZLG-DC-266


U1-266


LS-266


AH1200


1200ABP


1200ABP

ESI Access Sdn Bhd
24, Jalan Industri USJ 1/12, Taman Perindustrian USJ 1, 47610 Subang Jaya, Selangor, Malaysia.
+603 8024 9318
sales@esi-access.com
www.esi-access.com

AGM10327