Excel Security Innovation

MODEL

6250DLD-DS



600 DOUBLE MONITORED MAGLOCK WITH DOOR STATUS MONITORING

12/24 VDC

600 double monitored electromagnetic lock with 275 kg holding force, ideal for most indoor installations. Equipped with LED lock status indication and relay outputs for remote signalling, plus door status monitoring for door position detection.

- Life Safety Applications
- Zero Residual Magnetism
- RoHS Compliant
- 12/24 VDC Selectable
- MOV Surge & Spike Protection

SPECIFICATIONS

Holding Force	Up to 600lbs (275kg)
Lock Status Monitoring	Yes (LED Indicator & Door Position Contact)
Current / Voltage	12VDC : 480mA ±10% 24VDC : 240mA ±10%
EST Weight	4kg approx
Housing	Anodized Aluminium
Operating Temperature	-10 ~ +55° C
Operating Humidity	0~95% (non condensing)

DIMENSIONS (mm)

CODE: 6250DLD-DS

Maglock Size (L × W × H)	500 × 48 × 25 mm	
Armature Plate Size (L × W × H)	190 × 38 × 11 mm	x 2

MAGLOCK

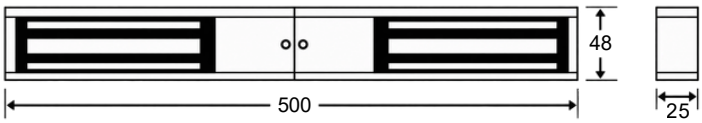

ARMATURE PLATE



x 2

Note: All dimensions are in millimetres (mm). Dimensions shown are nominal. Unless otherwise specified, a manufacturing tolerance of ±0.5 mm applies.

COMPATIBLE BRACKETS


ZL-250


U1-250


AZLG-250


AH600


AZLG-DC-250


DSU1-250


CL-250

ESI Access Sdn Bhd
24, Jalan Industri USJ 1/12, Taman Perindustrian USJ 1, 47610 Subang Jaya, Selangor, Malaysia.
+603 8024 9318
sales@esi-access.com
www.esi-access.com

AGM10327